

A Donaldson Company

A WORLD LEADER IN FUME EXTRACTION TECHNOLOGY

FumeCAB 1000 iQ

ELECTRONICS, PHARMACEUTICAL & MEDICAL

Last Updated on 14.09.2018





The complete cabinet fume extraction solution for a broad range of applications.

Partial enclosures are becoming the recommended extraction option for a variety of applications. Government bodies, including the in the HSE are now making direct reference through guidance documentation such as the HSG258 to their use.

The FumeCAB 1000 iQ integrated filtration system has been designed to ensure compliance with the latest regulations. It provides users with an extra depth of working space for taller applications.

BOFA's iQ Operating System and ultrabright slimline energy saving LED lights come as standard making this system an ideal choice of fume extraction for a wide variety of applications.

More information about the Intelligent (iQ) Operating System.

Technology



Intelligent (iQ)
Operating System



HEPA filter



Automatic flow control (AFC) technology



Reverse flow air (RFA) technology



Advanced carbon filter (ACF) technology



Patented technology



ProTECT service plan



SureCHECK quality standard

Key features of the FumeCAB 1000 iQ

Certified to BS 7989:2001 Recirculatory filtration fume cabinet specification

Standard

Reverse flow filter technology Standard

Ensures operational compliance with HSG258 guidelines Standard

Automatic flow control system
Standard

Contact BOFA at https://bofainternational.com/en/contact/

https://bofainternational.com/en/portal/datasheets/fumecab-1000-iq/















Energy saving ultra-bright slim line LED lighting

Standard

Combined HEPA/Gas filter incorporating ACF technology

Standard

Real time airflow reading

Standard

High contrast display

Standard

Remote diagnostics via USB

Standard

Side entry blind grommets for equipment access

Standard

Interfacing Optional

Stand

Optional

Twin coated anti UV / anti splash protective Polycarbonate

visor

Standard

Filters with long life and low replacement cost

Standard

Independent filter condition monitoring, display and warnings

Standard

'Run safe' operation

Standard

Large working area

Standard

VOC gas sensor (Volatile Organic Compound)

Optional

UV lighting

Optional

Optional filter medias

Optional

Technical specification

1. iQ display

5. Transparent visor

9. Exhaust

2. On / Off switch

6. Hinges

10. Cooling air inlet

3. Filter compartment hinges

7. Mains inlet

11. Standby button

4. Cable entry grommet


8. LED lighting

12. UV lighting (optional)






Left Side / Internal work area

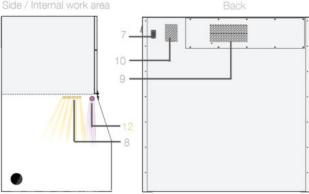

Internal work area and optional stand

13. Stand (optional)

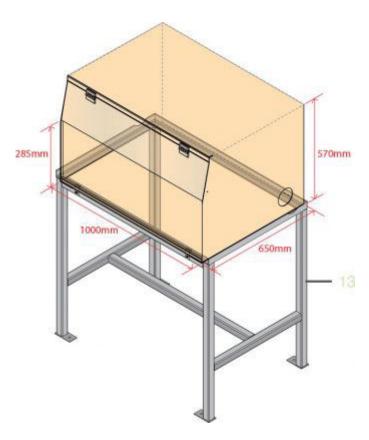

Airflow through filters



Chemical filter




HEPA filter



Clean air



Contaminated air

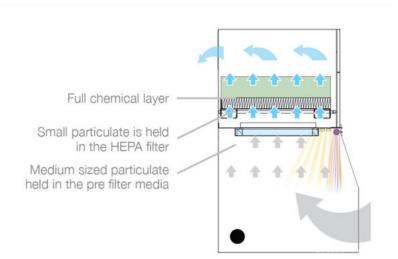

Technical data		
	EU	US
Dimensions (HxWxD)	1003 x 1000 x 655mm	39.49 x 39.37 x 25.79"
Opening dimensions (HxWxD)	285 x 1000 x 650mm	11.2 x 39.4 x 25.6"
Cabinet construction	Powder coated mild steel	Powder coated mild steel
Face velocity	0.4m/s	78.7ft/min

Technical data		
Max face velocity	0.6m/s	118ft/min
Electrical data	230v 50/60Hz Full load current: 6 amps	115v 50/60Hz Full load current: 10 amps
Noise level	< 60dBA (At typical operating speed)	< 60dBA (At typical operating speed)
Weight	120kg	264lbs
Exhaust outlet (Optional)	125mm	125mm
Approvals	CE	CE

Pre filter specifications	
Filter media construction	Filter pad
Filter housing	Cardboard
Filter efficiency	99% @ 0.3 microns

Combined HEPA/Gas filter specifications	
HEPA filter media	Glass fibre
HEPA media construction	Maxi pleat construction with webbing spacers
Filter housing	Zintec mild steel
Treated activated carbon	17kgs (37.4 lbs)
Filter efficiency	99.997% @ 0.3 microns

Optional stand specifications	
Dimensions (HxWxD)	943 x 1029 x 669mm / 37.1 x 40.5 x 26.3"
Stand Construction	Powder coated mild steel

Unit part numbers		
Model	Voltage	Part No.
FumeCAB 1000 iQ Powder coated	230V	E2242A
FumeCAB 1000 iQ Powder coated	115V	E2241A

Replacement filter part numbers	
Model	Part no.
Pre Filter	A1030249
Combined Filter	A0130250

Datasheet correct at time of publishing.

Where applicable, the carbon used in BOFA units is capable of removing a wide range of VOC's, however it is the responsibility of the user to ensure the carbon is suitable for their application. For specific applications, please contact us for details.

Think before you print! Please consider the environment before printing this document.

